

INSTALLATION MANUAL

Level of Difficulty


Easy

Wiring Location(s)

S1 and S2

Wiring Location Guide* for SUVs and Vans (S)

S1	Behind driver side taillight housing
S2	Behind passenger side taillight housing
S3	Behind driver side rear access panel
S4	Behind passenger side rear access panel
S5	Behind driver side rear bumper
S6	Behind center of rear bumper
S7	Behind passenger side rear bumper
S8	Under rear floor panel
S9	Behind driver side rear access panel
S10	Behind passenger side rear access panel

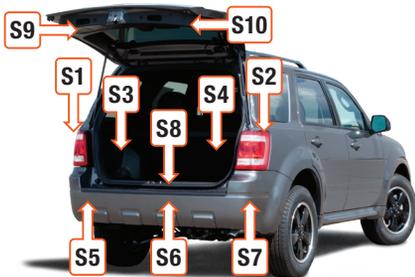

*Representative vehicle shown

Tools Required

Socket, 8 mm	Ratchet
Socket extension	Fish wire

⚠ WARNING

Do not exceed product rating or tow vehicle lamp load rating, whichever is lower.

NOTICE

Before you begin installation, read all instructions thoroughly.

Proper tools will improve the quality of installation and reduce the time required.

All steps must be followed to ensure the product will function properly. Once installed, test for proper function by using a test light or connecting a properly wired trailer.

Maintenance

Periodic inspection of all wires and connections should be performed to ensure there is no visible damage or loose connections.

Product Registration and Warranty

CURT Group stands behind our products with industry-leading warranties. Provide feedback and help us to improve our products by registering your purchase at: warranty.curtgroup.com/surveys

Step 1

Locate the vehicle battery. Look up the battery location in the owner's manual of your vehicle. Disconnect the negative battery terminal. Be sure to fasten this wire down and away from the battery when completing the installation process.



Step 2

Open the rear hatch. Use an 8mm socket to remove the two screws securing taillight. Remove the taillight by pulling straight back.

Separate the connectors, taking care not to damage the locking tabs. Set the taillight aside.

Repeat on the other side of the vehicle.



Step 3 - How to use fish wire

A) Fish wire is a way to push or pull an electrical wire through a blind hole. Make sure the wire is long enough to stick out on the other side.

Insert the fish wire through the blind hole and locate it on the other side.

B) Use tape to secure the harness to the fish wire and pull back up.

The fish wire or harness may get hung up on something, if this happens you may have to push back down, wiggle it around or twist the wire to loosen it from what it's hung up on.

Fish wire could be anything from a cut-up wire hanger, stiff wire, rope or string depending on what is needed for the installation.



Step 4

Starting on the driver side, run a fish wire down between the body and the bumper cover. From under the vehicle locate the side of the custom RV harness with the yellow wire. Attach the yellow side to the fish wire and pull the harness up to the factory harness. Make sure the connectors are fully inserted with the locking tabs in place.

Install the taillight back into the taillight housing.



Step 5

From under the vehicle, route the harness with the green wire along the back side of the bumper. Secure any loose wires to the passenger side of the vehicle with the provided cable ties. Be sure to keep the wiring away from hot spots, pinch points or moving objects.

Repeat step 4 on the passenger side using the green wire.



Step 6

Locate a grounding point near the box such as an existing screw or bolt in the frame of the vehicle or drill a 3/32" pilot hole. The area should be free from rust, dirt, and paint (abrasive pad/paper to remove rust and paint). Secure the white ground wire with the ring terminal on the existing fastener or with the provided ground screw.

CAUTION

Check for miscellaneous items that may be hidden behind or under any surface before drilling to avoid damage and/or personal injury

NOTICE

Once the custom wiring harness is installed, verify that the harness is functioning by attaching the 4-flat to any vehicle with functioning trailer lights. The taillights on the tow vehicle should function along with the taillights on the towing vehicle.

Install your vehicle RV wiring harness add-on, allowing your RV harness to also act as a trailer light harness.

Once the function tests are complete, reinstall the taillight fasteners.

Step 7

Route the 4-flat above the driver-side exhaust and over to the aluminum A/C lines. A heat resistant shield will be on the 4-flat wire, adjust the heat shield on the harness to the area above the muffler and zip tie in place with the smaller cable ties provided.



Step 8

Route along the A/C lines between the driver side of the vehicle and the fuel tank to the front of the vehicle. Use the provided cable ties as needed to secure any loose wire.



Step 9

Keep following the A/C lines up the firewall to the top of the engine compartment. Zip tie as needed to keep the 4-flat away from hot spots, pinch points or moving objects.

Route the 4-flat wire along the firewall to the driver-side inner fender and follow the inner fender to the front core support. Mount the 4-flat in place on the front core support next to the air box.



Step 10

Secure any excess wire so that it is not drooping or dangling, but not so tight that it causes unnecessary strain to the wire which could lead to breakage over time. After removing slack from the 4-flat wire, tighten any zip ties and add as needed. Use a zip tie to fasten any excess wire to a solid spot along the driver-side inner fender.

Reinstall all items removed during install. If it was disconnected at the beginning of the installation, reconnect the negative battery terminal. Install the provided 4-flat dust cover to help prevent corrosion.